

CC LINEAR



PrimeLine NFC L-HSP DALI2

187399, 187400

Typical Applications

Built-in in linear luminaires for

- Office lighting
- Industrial lighting



PrimeLine NFC L-HSP DALI2

- **SELECTABLE OUTPUT CURRENT VIA NFC**
- **DIMMABLE: DALI (ED. 2) FULL COMPATIBILITY TO DALI2 PARTS: -251, -252, -253**
- **ADJUSTABLE OUTPUT CURRENT, CLO, DC LEVEL VIA NFC**
- **VERY LOW RIPPLE CURRENT: < 1%**
- **SURGE PROTECTION: UP TO 4 KV**
- **SUITABLE FOR EMERGENCY ESCAPE LIGHTING SYSTEMS ACC. TO EN 50172**
- **LONG SERVICE LIFE: UP TO 100,000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



PrimeLine NFC L-HSP DALI2

Product features

- Linear casing shape

Functions

- Programmable via NFC interface (contactless)
 - Selectable current output
 - Programmable CLO function
 - Adjustable DC level
 - Dali parameters

Electrical features

- Mains voltage: 220–240 V ±10%
- Mains frequency: 50–60 Hz
- DC operation: 198–276 V, 0 Hz
- Push-in terminals: 0.2–1.5 mm²
- Power factor at full load: > 0.97
- Max. working voltage (U_{OUT}): 300/400 V
- Secondary side switching of LED modules is not allowed.

Dimming


- Dimming range: 1 to 100%

Safety features

- Protection against transient main peaks
 - up to 2 kV (between L and N) and
 - up to 4 kV (between L/N and PE)
- Electronic short-circuit protection
- Overload protection
- Overtemperature protection
- Protection against "no load" operation
- Degree of protection: IP00
- Protection class I

Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
187399	20	48	270
187400	20	48	290

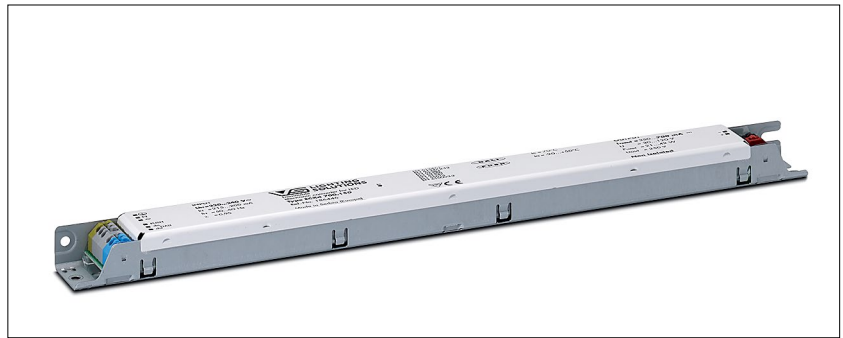

Applied standards

- EN 60598-2-22
- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 62386 DALI Ed. 2 Part 101,102,207,251,252,253
- EN 50172
- EN 55015

Dimensions

- Casing: M10
- Length: 359 mm
- Width: 30 mm
- Height: 21 mm




Dimming

Analogue



Current adjustment

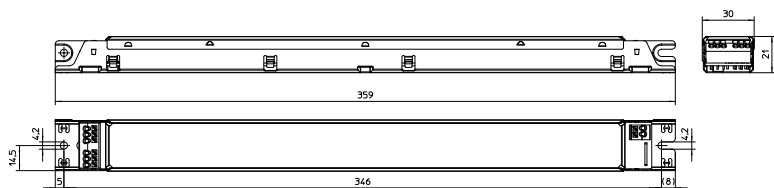

Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA (\pm 5%)	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
120	ECXd 800.657	187399	220–240	585–535	6 / 1000	350–800	88–280	< 4	> 95.5	< 2
165	ECXd 800.658	187400	220–240	800–735	6 / 1000	350–800	119–360	< 5	> 96.5	< 2

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.









Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
187399	-25	+50	5	60	-40	+85	5	95	+70	IP00
187400									+80	

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.		187400	
	187399	187400	187399	187400
All	65 °C	70 °C	75 °C	80 °C
hrs.	100,000	50,000	100,000	50,000


Product labels

<ul style="list-style-type: none"> ■ \oplus ■ N ■ L <ul style="list-style-type: none"> ■ da ■ da ■ PUSH 	INPUT U_N = 220 - 240 V I _N = 585 - 535 mA f _N = 0/50-60 Hz λ = 0,97 Range of application DC 198-276 V	 LIGHTING SOLUTIONS Vossloh-Schwabe Deutschland GmbH Stuttgarter Straße 61/1, 73614 Schorndorf Electronic converter for LED Type ECXd 800.657 Ref.-No. 187399 Made in Serbia (Europe)	 PUSH	 Non isolated	<table border="1"> <thead> <tr> <th colspan="2">OUTPUT</th> </tr> </thead> <tbody> <tr> <td>Inrated [mA]</td> <td>350-800</td> </tr> <tr> <td>Unrated [V]</td> <td>88-280</td> </tr> <tr> <td>Prated [W]</td> <td>52-120</td> </tr> <tr> <td>t_c [°C]</td> <td>70</td> </tr> <tr> <td>t_a [°C]</td> <td>-25...+50</td> </tr> <tr> <td>U_{sur} [V]</td> <td>300</td> </tr> </tbody> </table>	OUTPUT		Inrated [mA]	350-800	Unrated [V]	88-280	Prated [W]	52-120	t _c [°C]	70	t _a [°C]	-25...+50	U _{sur} [V]	300	LED+ ■ LED- ■ 
OUTPUT																				
Inrated [mA]	350-800																			
Unrated [V]	88-280																			
Prated [W]	52-120																			
t _c [°C]	70																			
t _a [°C]	-25...+50																			
U _{sur} [V]	300																			
<ul style="list-style-type: none"> ■ \oplus ■ N ■ L <ul style="list-style-type: none"> ■ da ■ da ■ PUSH 	INPUT U_N = 220 - 240 V I _N = 800 - 735 mA f _N = 0/50-60 Hz λ = 0,97 Range of application DC 198-276 V	 LIGHTING SOLUTIONS Vossloh-Schwabe Deutschland GmbH Stuttgarter Straße 61/1, 73614 Schorndorf Electronic converter for LED Type ECXd 800.658 Ref.-No. 187400 Made in Serbia (Europe)	 PUSH	 Non isolated	<table border="1"> <thead> <tr> <th colspan="2">OUTPUT</th> </tr> </thead> <tbody> <tr> <td>Inrated [mA]</td> <td>350-800</td> </tr> <tr> <td>Unrated [V]</td> <td>120-360</td> </tr> <tr> <td>Prated [W]</td> <td>95-165</td> </tr> <tr> <td>t_c [°C]</td> <td>80</td> </tr> <tr> <td>t_a [°C]</td> <td>-25...+50</td> </tr> <tr> <td>U_{sur} [V]</td> <td>400</td> </tr> </tbody> </table>	OUTPUT		Inrated [mA]	350-800	Unrated [V]	120-360	Prated [W]	95-165	t _c [°C]	80	t _a [°C]	-25...+50	U _{sur} [V]	400	LED+ ■ LED- ■ 
OUTPUT																				
Inrated [mA]	350-800																			
Unrated [V]	120-360																			
Prated [W]	95-165																			
t _c [°C]	80																			
t _a [°C]	-25...+50																			
U _{sur} [V]	400																			


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 187399 / Type ECXd 800.657


Working area

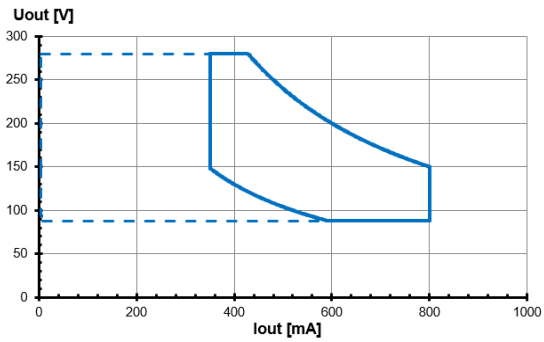


Efficiency

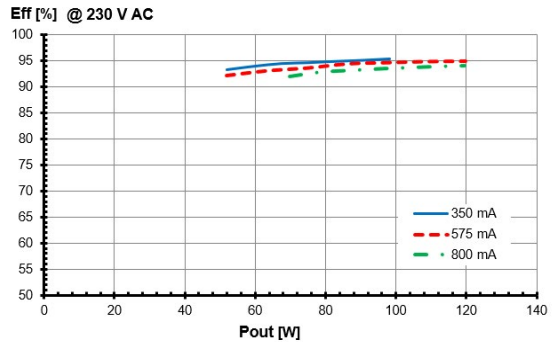

Power factor

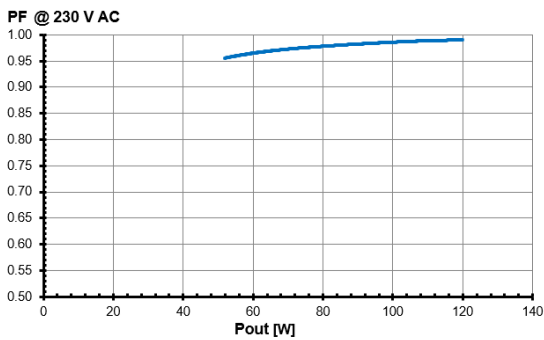


Total harmonic factor (THD)

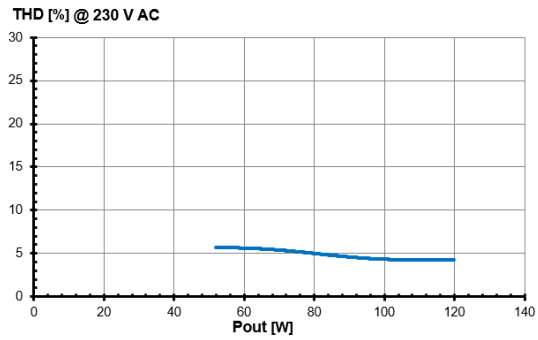


Typ. performance graphs for 187400 / Type ECXd 800.658


Working area

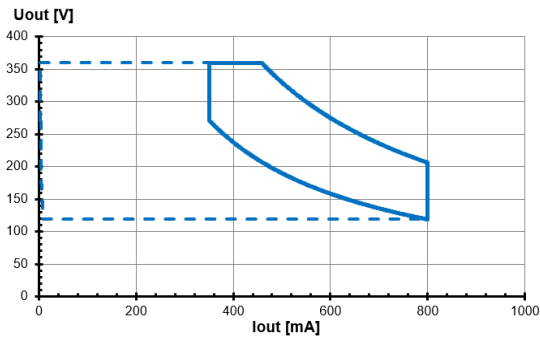


Efficiency

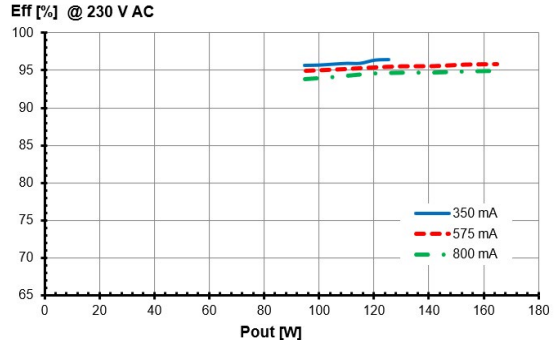

Power factor

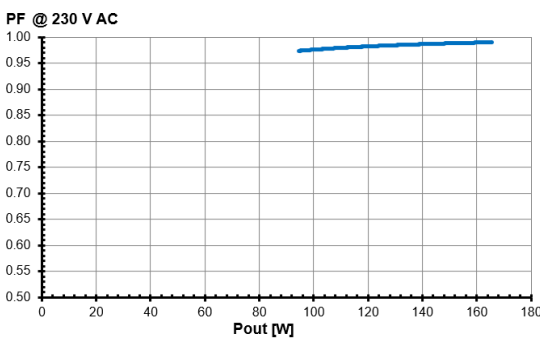

Total harmonic factor (THD)

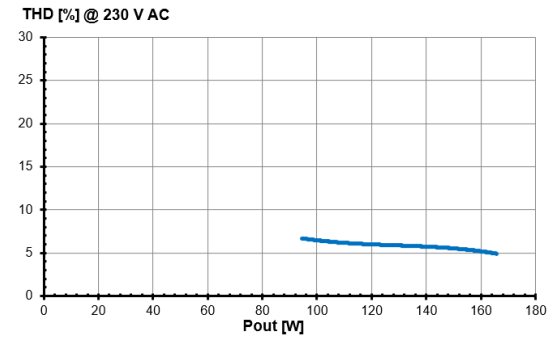

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Safety functions

- Transient mains peaks protection:
 - Values are in compliance with EN 61547 (interference immunity).
 - Surges between L–N: up to 2 kV
 - Surges between L/N–PE: up to 4 kV
- Short-circuit protection: The control gear is protected against permanent short-circuit with automatic restart function.
- Overload protection: The control gear only works in range of rated output power and voltage problemfree. Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection acc. to EN 61347-1 C 5e. In case of overheating the control gear will reduce the output power.
- No load operation: The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

Output voltage (U_{OUT})

According to EN 61347-1, U_{OUT} indicates which voltage can occur at the output terminals directly or between the output terminals and the PE terminal of the LED driver. This value is given for non-insulated drivers.

The used LED module must have an insulation voltage that is at least as high as the specified U_{OUT} voltage of the driver.

Leakage current

Leakage currents are present in all electronic converters or luminaires with PE connection and must be observed especially when using non-insulated LED drivers.

The PCB surfaces of LED modules form a capacitance with grounded LED aluminum circuit boards, heat sinks or mounting plates. This leads to capacitive leakage currents between the connection poles of the LED (+ and –) and the PE terminal. These capacitances should be kept as small as possible, since they are responsible for a possible glowing or flickering of the LEDs in standby mode. In extreme cases, the maximum permissible leakage current of the luminaire according to EN 60598 paragraph 10.3 may be exceeded. The leakage current is also relevant when using RCD circuit breakers.

Feig programmer



OR



Feig NFC antenna



VS NFC LED Driver (operation device)

Parametrization via NFC

- DC and emergency lighting operation
 - The control gears are suitable for direct voltage operation (DC). Reliable DC operation is guaranteed if the specified working area of LED driver is maintained.
 - DC range: 198–276 V
 - Reducing to 176 V: With reduced service life time possible
 - Light level at DC operation (EOF_i): 15% (adjustable)
 - DC level range: 0/1–100% (programmable via NFC)
 - DC operation: acc. to EN 60598-2-22 the LED current reduction at high temperature is limited to 50% to nominal current.
- Constant lumen output (CLO)
 - In the most cases the CLO function is used to reduce system performance over the life of an LED system.
 - The luminous flux of LED modules decreases in a step-wise manner up to the end of the modules' service life. To guarantee constant luminous flux, the output of the control gear must be gradually increased over its service life.
 - Defining the CLO function its needed to program the start, provisional and end value, respectively the LED lifetime via the NFC programmer.
- Current adjustment (mA)
 - Factory setting: minimum current
 - Programmable output current via NFC
- DALI-Configuration
 - Programming of Short address, Groups, Fade times and Scenes
 - Programming of Lightlevel for Power On, System Failure, Min and Max
- DALI Memorybank 1
 - Store Luminaire information data according EN 62386-251
- Diagnostics and Maintenance
 - Set configurable values described in EN 62386-253, -254
 - Read counters described in EN 62386-252, -253, -254 (Refresh rate is 1 hours of control gear operating time.)

The driver can be programmed via NFC at the earliest 15 seconds after the mains voltage has been switched off.

System architecture – NFC configuration

- With the NFC programmer (Ref. No. 186646) and the EnOcean USBStick (Ref. No. 186563) or alternatively with a Feig Programmer or the Feig NFC antenna, contactless programming of NFC LED drivers is possible.
- The LED driver is programmed via NFC in a de-energised state.
- The use of the NFC programmer is flexible in the production or already in the pre-assembly process. A complex commissioning is not required. The operation and parameterization is done in the simplest way. All operating parameters can be individually programmed and updated.
- The exact description of the programming can be found in the operation manual of the NFC programmer.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1


Mechanical mounting

- Mounting position: Any position inside a luminaire is allowed. LED drivers are not allowed to use for independent applications.
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices. Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP00
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing. LED drivers should be mounted with the greatest possible clearance to heat sources. During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of 0.2–1.5 mm², AWG24-16
- Stripped length: 8.5–9.5 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference). Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.
- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.
- Secondary load: The sum of forward voltages of LED loads (incl. tolerances) has to be within the values which are mentioned in the table "Electrical Characteristics" in this data sheet.

Wiring diagram:

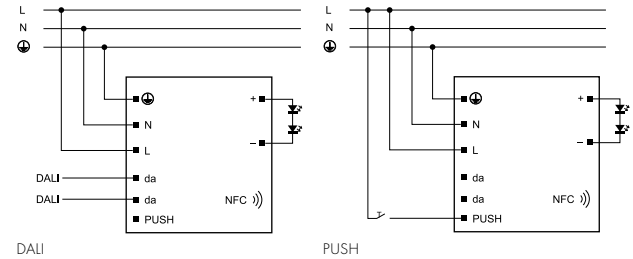

DALI wiring:

As a standard DALI bus is not SELV-compliant, the DALI lead must be rated for mains voltage. The power supply and the DALI lead can be laid in a single cable provided the cable does not exceed a maximum length of 100 m, e.g. using 5x1.5 mm². Please observe the maximum lengths of the DALI lead during installation:

	$\geq 1.5 \text{ mm}^2$	1 mm^2	0.75 mm^2	0.5 mm^2
6.2 Ω max.	300 m	180 m	130 m	80 m

DALI

- DALI function: The DALI interface (Digital Addressable Lighting Interface) is a digital interface for communication between the control gear and the DALI control system. The DALI control system enables, for example, the dimming of the LED module. The respective triggers (e.g. by sensors) for dimming or parameter queries depend on the respective DALI control system. In addition, the control gear can be configured via the DALI interface. This requires an additional programming unit, e.g. commercially available DALI programming units. The DALI control system is connected via the terminal pair da/da.
- DALI bus: If the DALI bus is connected, the device starts with the preset PowerOnLevel 100%. If no DALI bus is connected, the device also starts with 100% light level in system failure mode.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs

High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.

- Release reaction

The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.

- No. of LED drivers

The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m [2,5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.		
Automatic cut-out type B				
		B 10 A	B 13 A	B 16 A
ECXd 800.657	187399	12	16	19
ECXd 800.658	187400	11	14	17
Automatic cut-out type C				
		C 10 A	C 13 A	C 16 A
ECXd 800.657	187399	15	19	24
ECXd 800.658	187400	11	14	17

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

EU compliance information

Hereby, Vossloh-Schwabe Deutschland GmbH declares that the radio equipment type PrimeLine NFC L-HSP DALI2 B2L-ready is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address: www.vossloh-schwabe.com.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.