

CC COMPACT DIP SWITCH DIMMABLE



COMFORTLINE DIP SWITCH C DALI2-BASIC

187439, 187440, 187441, 187442, 187475, 187443

Typical Applications

Built-in in compact luminaires for

- Shop lighting
- Office lighting
- Residential lighting
- Downlights



EasyLine DIP switch C-R1

■ **SELECTABLE OUTPUT CURRENT
VIA DIP SWITCH**

■ **DIMMABLE: DALI (ED.2)**

■ **VARIOUS CORD GRIPS CAN BE FITTED**

■ **SELV**

■ **LONG SERVICE LIFE:
UP TO 100.000 HRS.**

■ **PRODUCT GUARANTEE: 5 YEARS**



ComfortLine DIP switch C DALI2-Basic

Product features

- Compact casing shape

Functions

- Selectable current output by dip-switch

Electrical features

- Mains voltage: 220–240 V $\pm 10\%$
- Mains frequency: 50–60 Hz
- Push-in terminals:
rigid 0.5–1.5 mm²
strand 0.75–1.5 mm²
- Power factor at full load: > 0.95
- Open circuit voltage ($U_{max.}$): 60 V
- Secondary side switching of LED modules is not allowed.

Dimming

- Dimming range: 1 to 100%
(3-100% for 187439 at 350/500/550mA)

Safety features



- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Degree of protection: IP20
- Protection class II
- SELV
- SVM: < 0.4
- PstLM: < 1

Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
187439	20	200	70
187440	20	200	70
187441	20	200	87
187442	20	200	90
187475	20	200	140
187443	20	200	140

Product guarantee

- 5 years
for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

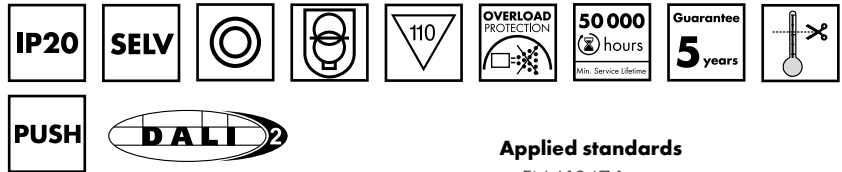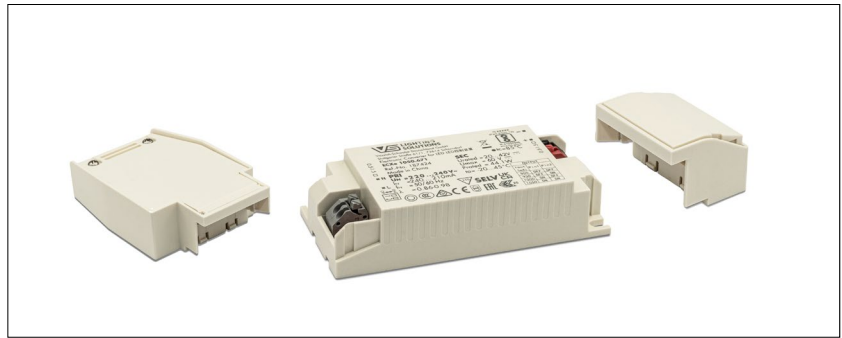


Dimming

Analogue

Dimensions

Ref. No.	Casing	Length mm	Width mm	Height mm
ALL	K107	97	43	23

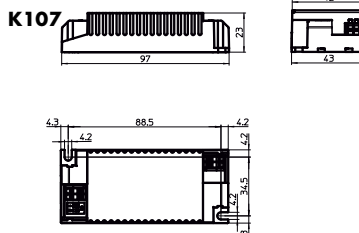

Cord grip "sl" for K107

Available for independent operation

1 Cord-Grip contains one upper and one lower part

Available separately

2 cord grips per LED driver required

Permitted diameter of the cable mantle: 3-7mm

Packaging unit: 20 pcs.

Ref. No.: 187450 (1 pcs Cord Grip sl for K107)

Cord grip "ws" for K107

Available for independent operation

Available separately

2 cord grips per LED driver required

Permitted diameter of the cable mantle: 3-9mm

Packaging unit: 20 pcs.

Ref. No.: 187451 (1 pcs Cord Grip ws for K107)

Cord grip "LLO" for K107

Available for independent operation

Available separately




Permitted diameter of the cable mantle: 5-12mm

Packaging unit: 20 pcs.

Best.-Nr.: 187452 (1 pcs LLO(5pin) for K107)

Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2/EN 61000-3-3
- EN 62384
- EN 55015
- EN 61000-4-2/EN 61000-4-5
- IEC 62386 ed.2 part 101/102/207



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Drivers – ComfortLine DIP switch C DALI2-Basic

Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA (\pm 5%; for 14W \pm 7,5%)	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
14	ECXd 700.674	187439	220–240	86–65	14/254	350/500/550/700	6-20	15	84	<5
17	ECXd 400.675	187440	220–240	100–75	15/234	250/300/350/400	20-42	13	87	<5
25	ECXd 600.676	187441	220–240	140–110	16/238	450/500/550/600	20-42	15	89	<5
33	ECXd 800.677	187442	220–240	185–165	24/240	650/700/750/800	20-42	11	89	<5
40	ECXd 800.693	187475	220–240	215–180	24/240	500/600/700/800	30-50	11	89	<5
44	ECXd 1050.678	187443	220–240	240–200	24/240	900/950/1000/1050	20-42	10	89	<5

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
187439, 187440, 187441, 187442	–20	+45	10	90	–40	+85	5	95	+75	IP20
187475, 187443	–20	+45	10	90	–40	+85	5	95	+85	IP20

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.		Ref. No.	
	187439, 187440, 187441, 187442		187475, 187443	
All	65 °C*	75 °C	75 °C*	85 °C
hrs.	100.000	50.000	100.000	50.000

* recommended operation temperature

Product labels

VS LIGHTING SOLUTIONS 5727 Q
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1, 73614 Schorndorf
Electronic Converter for LED LED控制装置
IS 15885 (Part 2/Sec 13)
only BIS R-X000XX www.bis.gov.cn

ECXd700.674
Ref.-No. 187439
Made in China
UN = 220...240V-
In = 85...65 mA
fn = 50/60 Hz
λ = 0.7-0.96
PUSH
DALI2

SEC SELV
Urated = 20...20V
Umax = 60 V
Prated = 14W
ta = -20...45°C
t_c = 75°C
OUTPUT
Pin1 Pin2
350 OFF OFF
500 OFF ON
550 ON OFF
700 ON ON

VS LIGHTING SOLUTIONS 5727 Q
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1, 73614 Schorndorf
Electronic Converter for LED LED控制装置
IS 15885 (Part 2/Sec 13)
only BIS R-X000XX www.bis.gov.cn

ECXd400.675
Ref.-No. 187440
Made in China
UN = 220...240V-
In = 100...75 mA
fn = 50/60 Hz
λ = 0.85-0.97
PUSH
DALI2

SEC SELV
Urated = 20...42V
Umax = 60 V
Prated = 16.8W
ta = -20...45°C
t_c = 75°C
OUTPUT
Pin1 Pin2
250 OFF OFF
300 OFF ON
350 ON OFF
400 ON ON

VS LIGHTING SOLUTIONS 5727 Q
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1, 73614 Schorndorf
Electronic Converter for LED LED控制装置
IS 15885 (Part 2/Sec 13)
only BIS R-X000XX www.bis.gov.cn

ECXd600.676
Ref.-No. 187441
Made in China
UN = 220...240V-
In = 140...110 mA
fn = 50/60 Hz
λ = 0.85-0.97
PUSH
DALI2

SEC SELV
Urated = 20...42V
Umax = 60 V
Prated = 25.2W
ta = -20...45°C
t_c = 75°C
OUTPUT
Pin1 Pin2
450 OFF OFF
500 OFF ON
550 ON OFF
600 ON ON

VS LIGHTING SOLUTIONS 5727 Q
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1, 73614 Schorndorf
Electronic Converter for LED LED控制装置
IS 15885 (Part 2/Sec 13)
only BIS R-X000XX www.bis.gov.cn

ECXd800.677
Ref.-No. 187442
Made in China
UN = 220...240V-
In = 185...165 mA
fn = 50/60 Hz
λ = 0.85-0.97
PUSH
DALI2

SEC SELV
Urated = 20...42V
Umax = 60 V
Prated = 34W
ta = -20...45°C
t_c = 75°C
OUTPUT
Pin1 Pin2
650 OFF OFF
700 OFF ON
750 ON OFF
800 ON ON

VS LIGHTING SOLUTIONS 5727 Q
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1, 73614 Schorndorf
Electronic Converter for LED LED控制装置
IS 15885 (Part 2/Sec 13)
only BIS R-X000XX www.bis.gov.cn

ECXd1050.678
Ref.-No. 187443
Made in China
UN = 220...240V-
In = 240...200 mA
fn = 50/60 Hz
λ = 0.9-0.97
PUSH
DALI2

SEC SELV
Urated = 20...42V
Umax = 60 V
Prated = 44.1W
ta = -20...45°C
t_c = 85°C
OUTPUT
Pin1 Pin2
900 OFF OFF
950 OFF ON
1000 ON OFF
1050 ON ON

VS LIGHTING SOLUTIONS 5727 Q
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1, 73614 Schorndorf
Electronic Converter for LED LED控制装置
IS 15885 (Part 2/Sec 13)
only BIS R-X000XX www.bis.gov.cn

ECXd800.693
Ref.-No. 187475
Made in China
UN = 220...240V-
In = 215...180 mA
fn = 50/60 Hz
λ = 0.88-0.97
PUSH
DALI2

SEC SELV
Urated = 30...50V
Umax = 60 V
Prated = 40W
ta = -20...45°C
t_c = 85°C
OUTPUT
Pin1 Pin2
500 OFF OFF
600 OFF ON
700 ON OFF
800 ON ON

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

DIP switch settings

187439 / ECXd 700.674					
Pin		Output	Current	Voltage	Factory-
1	2	W	mA	V	settings (mA)
OFF	OFF	7	350	6-20	350
OFF	ON	10	500		
ON	OFF	11	550		
ON	ON	14	700		

187440/ ECXd 400.675					
Pin		Output	Current	Voltage	Factory-
1	2	W	mA	V	settings (mA)
OFF	OFF	10,5	250	20-42	250
OFF	ON	12,6	300		
ON	OFF	14,7	350		
ON	ON	16,8	400		


187441 / ECXd 600.676					
Pin		Output	Current	Voltage	Factory-
1	2	W	mA	V	settings (mA)
OFF	OFF	18,9	450	20-42	450
OFF	ON	21,0	500		
ON	OFF	23,1	550		
ON	ON	25,2	600		

187442/ ECXd 800.677					
Pin		Output	Current	Voltage	Factory-
1	2	W	mA	V	settings (mA)
OFF	OFF	27,3	650	20-42	650
OFF	ON	29,4	700		
ON	OFF	31,5	750		
ON	ON	33,6	800		

187475/ ECXd 800.693					
Pin		Output	Current	Voltage	Factory-
1	2	W	mA	V	settings (mA)
OFF	OFF	25	500	30-50	500
OFF	ON	30	600		
ON	OFF	35	700		
ON	ON	40	800		


187443/ ECXd 1050.678					
Pin		Output	Current	Voltage	Factory-
1	2	W	mA	V	settings (mA)
OFF	OFF	37,8	900	20-42	900
OFF	ON	39,9	950		
ON	OFF	42	1000		
ON	ON	44,1	1050		

Typ. performance graphs for 187439 / ECXd 700.674

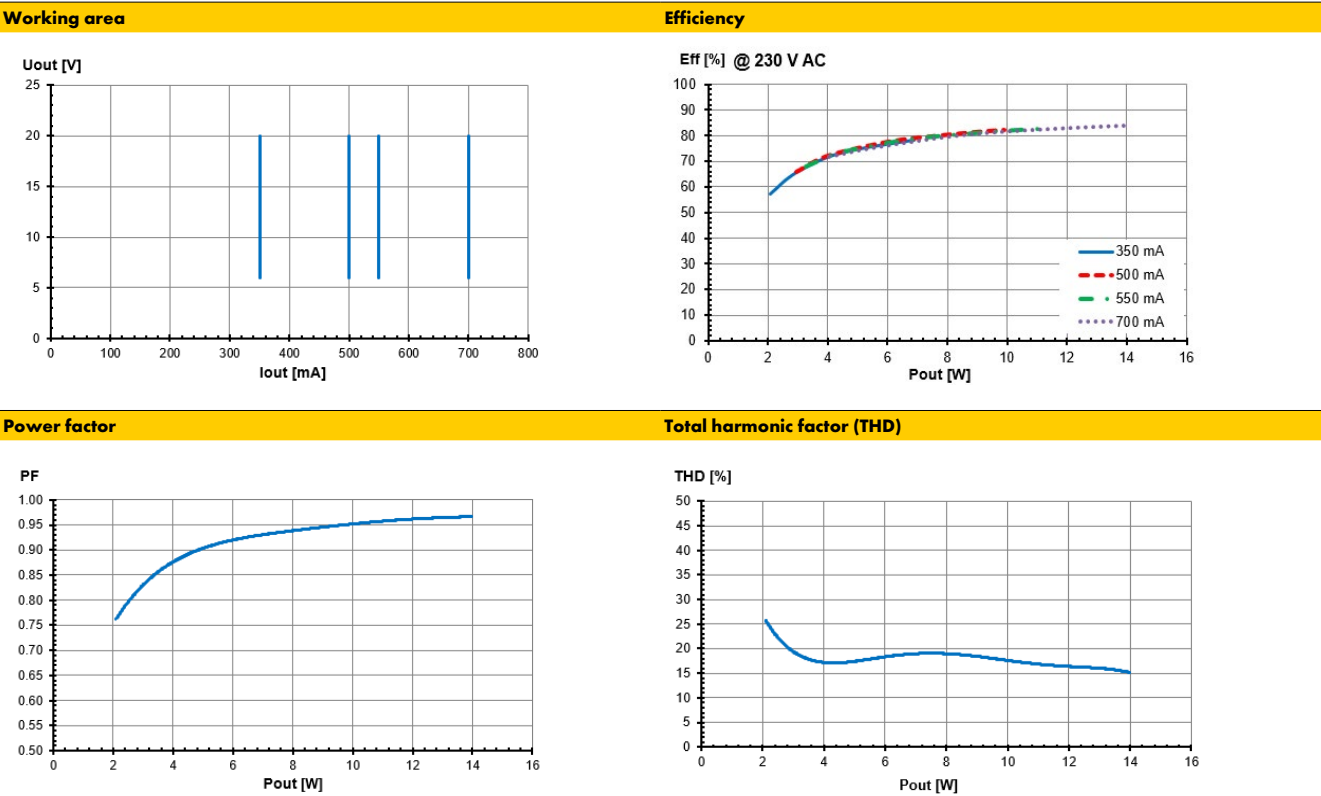


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 187440/ ECXd 400.675

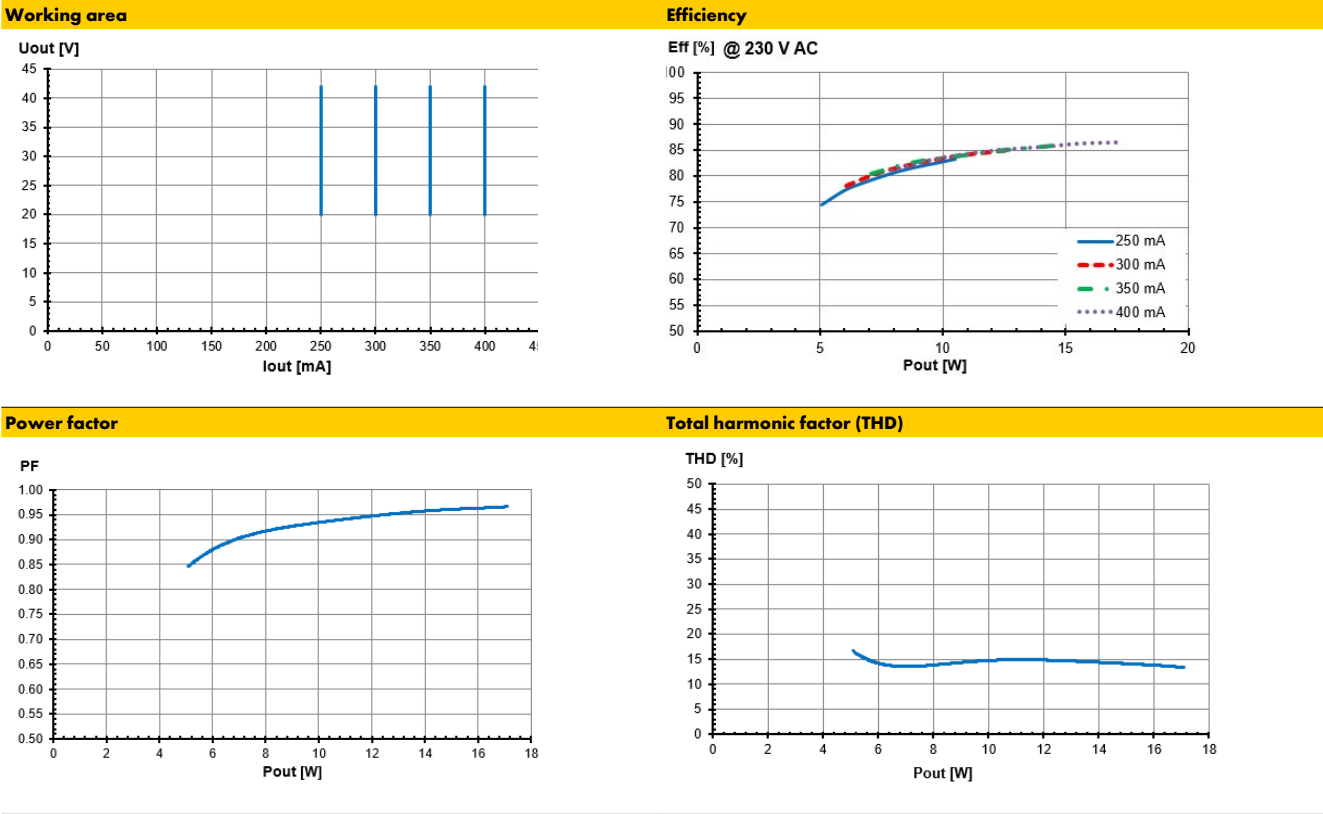


Typ. performance graphs for 187441 / ECXd 600.676

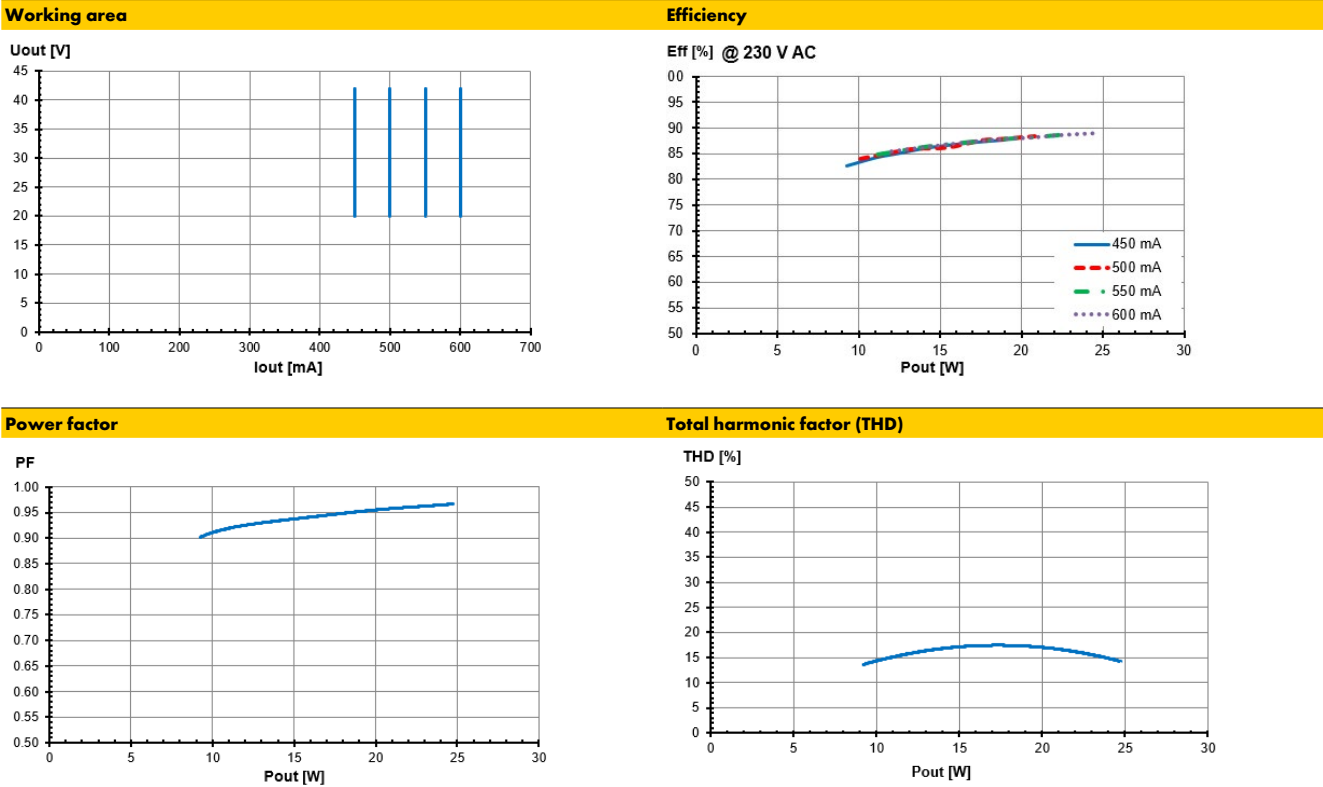


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 187442/ ECXd 800.677

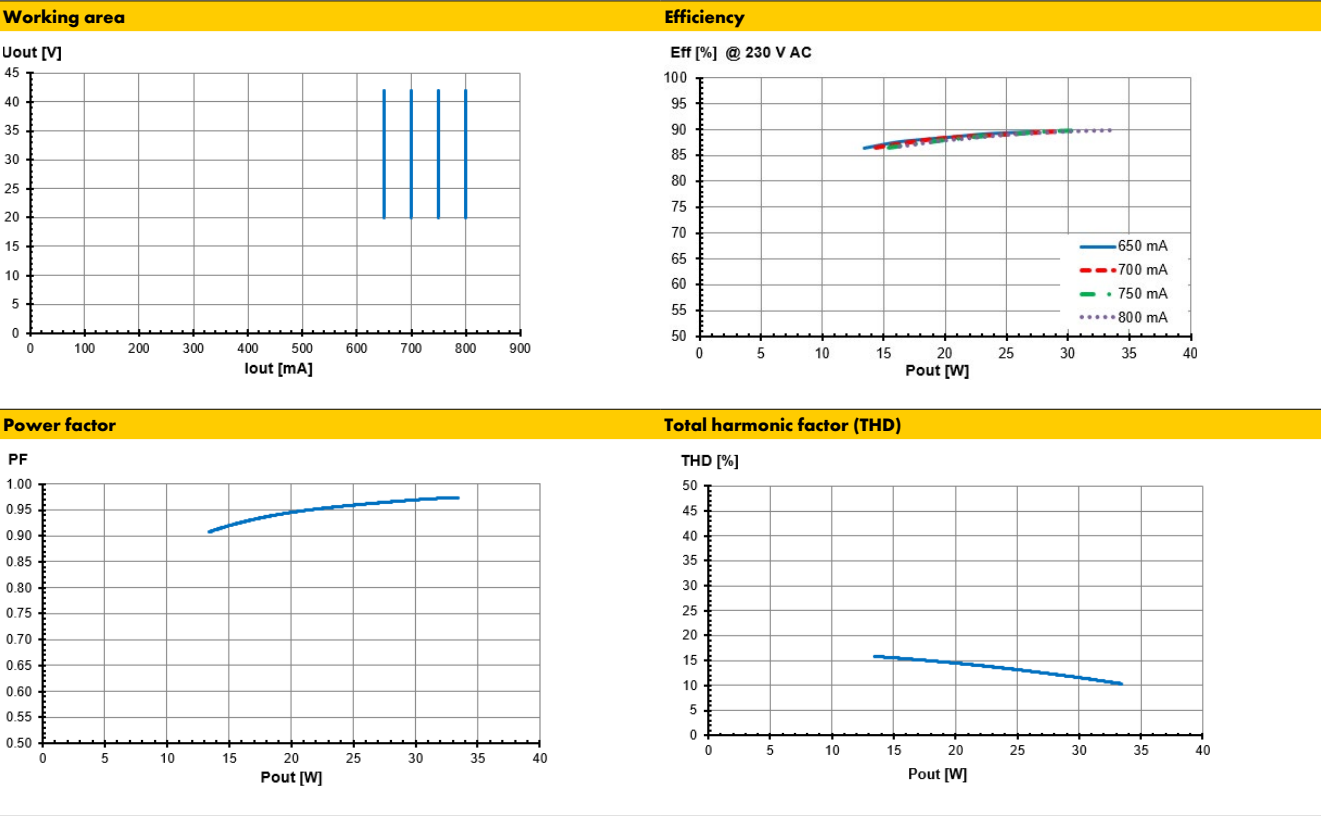


Typ. performance graphs for 187475/ ECXd 800.693

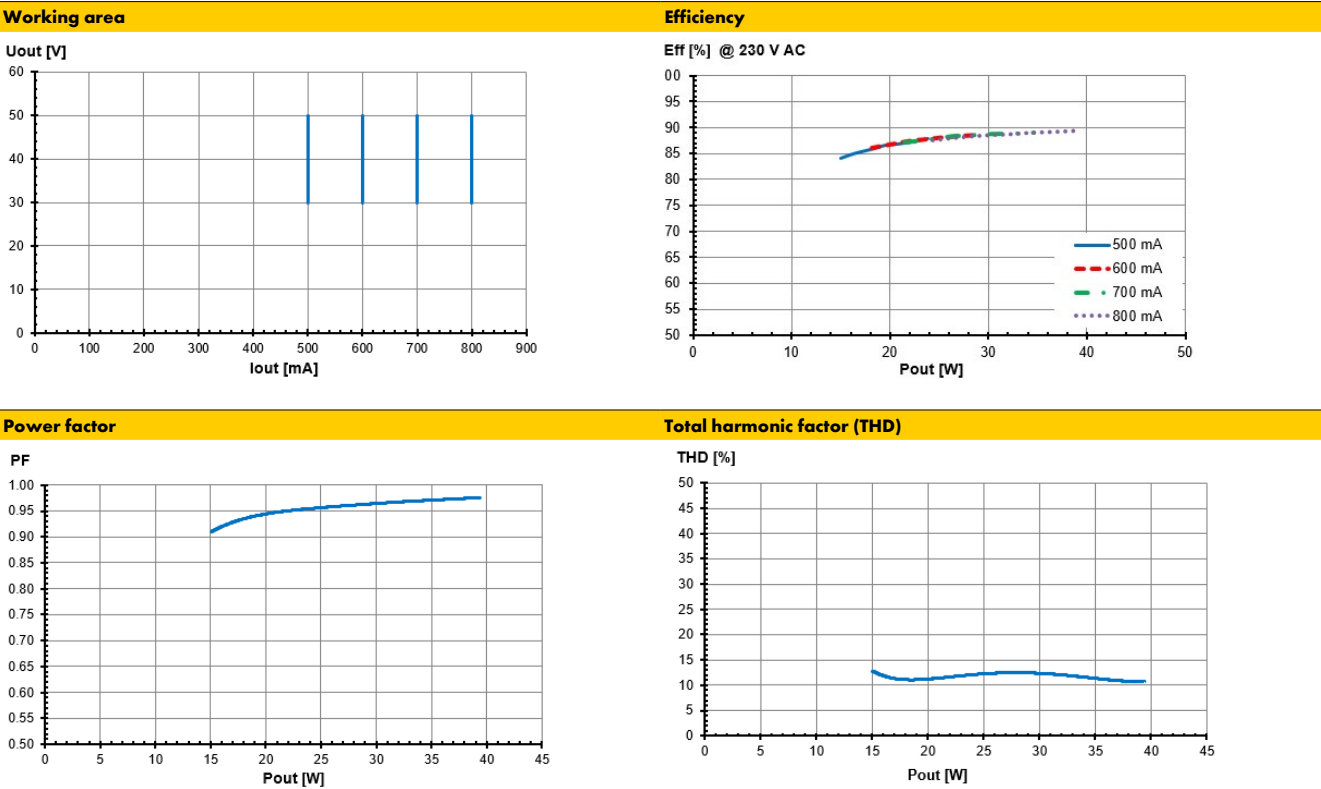


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs 187443/ ECXd 1050.678


Working area

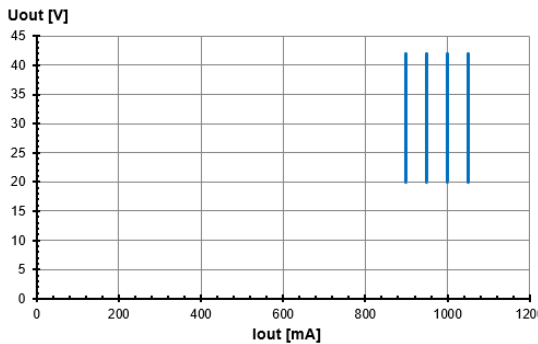


Efficiency

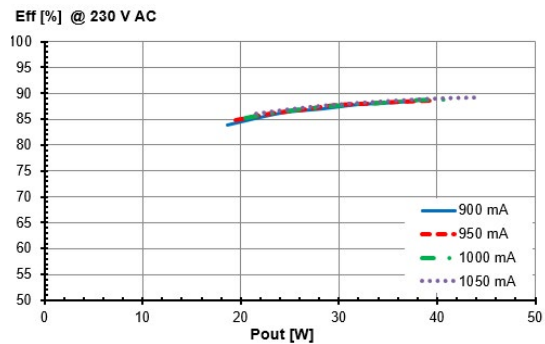

Power factor

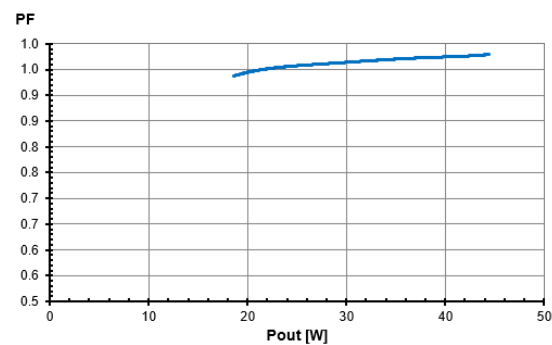

Total harmonic factor (THD)

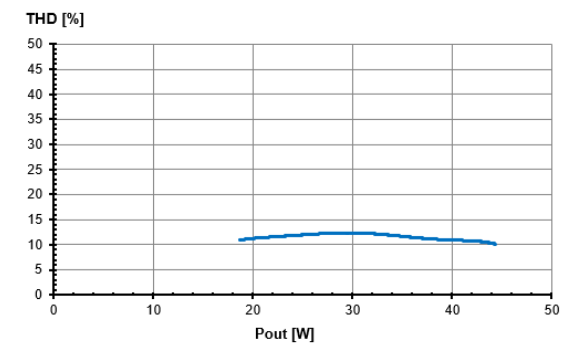

Safety functions

- Transient mains peaks protection:
Values are in compliance with EN 61547 (interference immunity).
Surges between L–N: up to 1 kV
- Short-circuit protection: The control gear is protected against permanent short-circuit with automatic restart function.
- Overload protection: The control gear only works in range of rated output power and voltage problemfree (< 60 V DC).
Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection.
In case of overheating (T_c max. + approx. 10°) the output current of the control gear will be reduced to 30%. After the temperature will drop below the critical temperature value, the output current rises again to the previously set value.
- No load operation: The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1


Mechanical mounting

- Mounting position: Built-in: Any position inside a luminaire is allowed
Independent application: Drivers are allowed to use for independent applications with separate cord grip.
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices.
Independent LED drivers do not need to be integrated into a casing.
Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing.
LED drivers should be mounted with the greatest possible clearance to heat sources.
During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of
built-in: 0,5-1,5mm² PVC cable
independent: 0,75-1,5mm² PVC cable
- Stripped length: 7–8 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.
Max. secondary side lead length: 2 m

- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.
- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.
- Parallel wiring: Parallel connection of LED loads is not allowed.
- Wiring diagram:

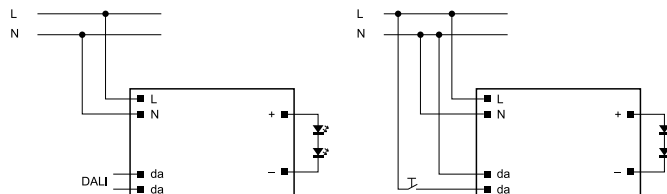

Note: Max. quantity of drivers at one push button: 30

Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641 part 11 for B characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m Ω (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
Automatic cut-out type		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
ECXd 700.674	187439	22	29	36	37	49	60
ECXd 400.675	187440	23	30	36	38	50	61
ECXd 600.676	187441	21	27	34	35	46	56
ECXd 800.677	187442	14	18	22	23	30	37
ECXd 800.693	187475	14	18	22	23	30	37
ECXd 1050.678	187443	14	18	22	23	30	37

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.