

CC COMPACT  
DIP SWITCH  
DIMMABLE



COMFORTLINE DIP SWITCH C  
DALI2-MEMORYDATA

187444, 187445

**Typical Applications**

Built-in in compact luminaires for

- Shop lighting
- Office lighting
- Downlights

ComfortLine DIP Switch C DALI2-MemoryData

- **SELECTABLE OUTPUT CURRENT VIA DIP SWITCH**
- **DIMMABLE: DALI (ED.2) MEMORY DATA SPECIFICATION (PARTS 251/252/253)**
- **VARIOUS CORD GRIPS CAN BE FITTED**
- **SELV**
- **LONG SERVICE LIFE: UP TO 100.000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



## ComfortLine DIP switch C DALI2-MemoryData

### Product features

- Compact casing shape

### Functions

- Selectable current output by dip-switch

### Electrical features

- Mains voltage: 220–240 V ±10%
- Mains frequency: 50–60 Hz, 0 Hz
- DC Operation: 176–276 V (range of application)
- Push-in terminals:  
rigid 0.5–1.5 mm<sup>2</sup>  
strand 0.75–1.5 mm<sup>2</sup>
- Power factor at full load: > 0.95
- Open circuit voltage (U<sub>max.</sub>): 60 V
- Secondary side switching of LED modules is not allowed.

### Dimming

- Dimming range: 1 to 100%

### Safety features



- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Degree of protection: IP20
- Protection class II
- SELV
- SVM: < 0.4
- PstLM: < 1

### Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
187444	20	200	85
187445	20	200	128

### Product guarantee

- 5 years  
for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage ([www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)).  
We will be happy to send you these conditions upon request.

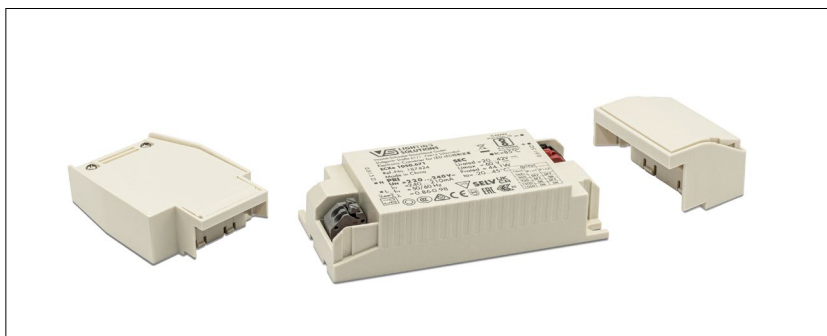


### Dimming

Analogue

### Dimensions

Ref. No.	Casing	Length mm	Width mm	Height mm
ALL	K107	97	43	23

### K107



### Cord grip "sl" for K107

Available for independent operation

1 Cord-Grip contains one upper and one lower part

Available separately

2 cord grips per LED driver required

Permitted diameter of the cable mantle: 3-7mm

Packaging unit: 20 pcs.

**Ref. No.: 187450** (1 pcs Cord Grip sl for K107)



### Cord grip "ws" for K107

Available for independent operation


Available separately

2 cord grips per LED driver required

Permitted diameter of the cable mantle: 3-9mm

Packaging unit: 20 pcs.

**Ref. No.: 187451** (1 pcs Cord Grip ws for K107)



### Cord grip "LLO" for K107

Available for independent operation

Available separately

Permitted diameter of the cable mantle: 5-12mm

Packaging unit: 20 pcs.

**Best.-Nr.: 187452** (1 pcs LLO(5pin) for K107)



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

# LED Drivers – ComfortLine DIP switch C DALI2-MemoryData

## Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / $\mu$ s	Current output DC mA ( $\pm$ 5%, for 14W $\pm$ 7,5%)	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
30	ECXd 700.679	<b>187444</b>	220–240	165–125	9/39	350-700	9-42	5	89	<5
44	ECXd 1050.680	<b>187445</b>	220–240	245–190	11/52	700-1050	9-42	5	89	<5

## Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at $t_c$ point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
<b>187444, 187445</b>	-20	+45	10	60	-40	+85	5	95	+85	IP20

## Expected service life time

at operation temperatures at  $t_c$  point

Operation current	Ref. No. <b>187444, 187445</b>	
All	75 °C*	85 °C
hrs.	100.000	50.000

\* recommended operation temperature

## Product labels

**VS LIGHTING SOLUTIONS**  
Vossloh-Schwabe Deutschland GmbH  
Stuttgarter Straße 61/1, 73614 Schorndorf  
Electronic Converter for LED

**ECXd700.679**  
Ref.-No. 187444  
Made in China

**PRI**  
**UN = 220...240V**  
**IN = 165...125mA**  
**fN = 0/50/60Hz**  
 **$\lambda$  = 0.6-0.99**

**SEC**  
Urated = 9...42V  $\overline{\text{---}}$   
Umax = 60 V  $\overline{\text{---}}$   
Prated = 29.4W  
 $t_a = -20...45^\circ\text{C}$   
 $t_c = 85^\circ\text{C}$

0.75-1.5  $\square$

LED+  $\blacksquare$   
LED-  $\blacksquare$   
0.5-1.5  $\square$

DIP switch settings			
load (mA)	Pin1	Pin2	Pin3
350	OFF	OFF	OFF
400	OFF	OFF	OFF
450	OFF	ON	OFF
500	OFF	ON	ON
550	ON	OFF	OFF
600	ON	OFF	ON
650	ON	ON	OFF
700	ON	ON	ON

**S727 Q** **PUSH** **SELV**

**VS LIGHTING SOLUTIONS**  
Vossloh-Schwabe Deutschland GmbH  $t_c$   
Stuttgarter Straße 61/1, 73614 Schorndorf  
Electronic Converter for LED

**ECXd1050.680**  
Ref.-No. 187445  
Made in China

**PRI**  
**UN = 220...240V**  
**IN = 245...190mA**  
**fN = 0/50/60Hz**  
 **$\lambda$  = 0.6-0.99**

**SEC**  
Urated = 9...42V  $\overline{\text{---}}$   
Umax = 60 V  $\overline{\text{---}}$   
Prated = 44.1W  
 $t_a = -20...45^\circ\text{C}$   
 $t_c = 85^\circ\text{C}$

0.75-1.5  $\square$

LED+  $\blacksquare$   
LED-  $\blacksquare$   
0.5-1.5  $\square$

DIP switch settings			
load (mA)	Pin1	Pin2	Pin3
700	OFF	OFF	OFF
750	OFF	OFF	ON
800	OFF	ON	OFF
850	OFF	ON	ON
900	ON	OFF	OFF
950	ON	OFF	ON
1000	ON	ON	OFF
1050	ON	ON	ON

**S727 Q** **PUSH** **SELV**

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.


# LED Drivers – ComfortLine DIP switch C DALI2-MemoryData

## DIP switch settings

187444 / ECXd 700.679						
Pin			Output	Current	Voltage	Factory- settings (mA)
1	2	3	W	mA	V	
OFF	OFF	OFF	14.7	350	9-42	350
OFF	OFF	ON	16.8	400		
OFF	ON	OFF	18.9	450		
OFF	ON	ON	21	500		
ON	OFF	OFF	23.1	550		
ON	OFF	ON	25.2	600		
ON	ON	OFF	27.3	650		
ON	ON	ON	29.4	700		


187445 / ECXd 1050.680						
Pin			Output	Current	Voltage	Factory- settings (mA)
1	2	3	W	mA	V	
OFF	OFF	OFF	29.4	700	9-42	700
OFF	OFF	ON	31.5	750		
OFF	ON	OFF	33.6	800		
OFF	ON	ON	35.7	850		
ON	OFF	OFF	37.8	900		
ON	OFF	ON	39.9	950		
ON	ON	OFF	42	1000		
ON	ON	ON	44.1	1050		

## Typ. performance graphs for 187444 / ECXd 700.679

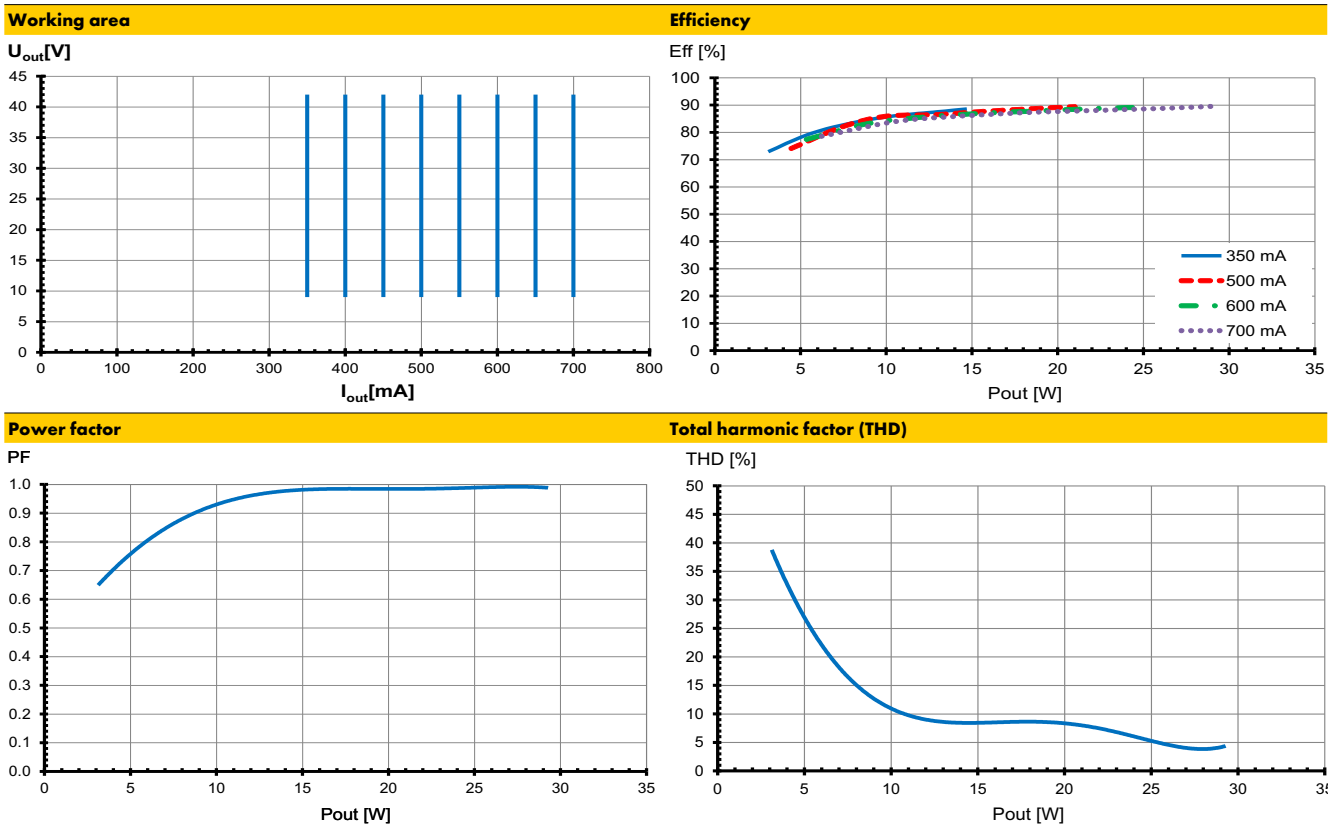

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Typ. performance graphs for 187445/ ECXd 1050.680

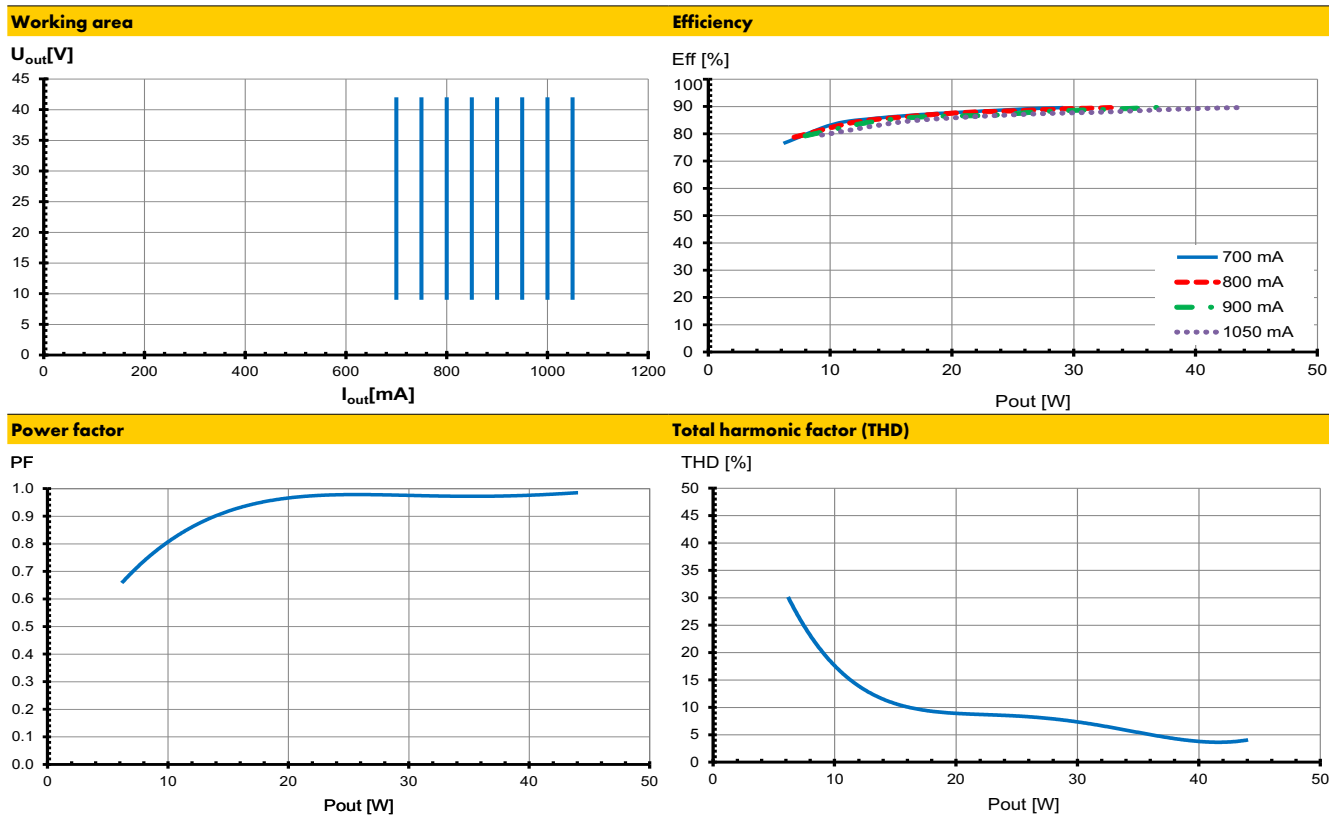

### Safety functions

- Transient mains peaks protection:
  - Values are in compliance with EN 61547 (interference immunity).
  - Surges between L–N: up to 1 kV
- Short-circuit protection: The control gear is protected against permanent short-circuit with automatic restart function.
- Overload protection: The control gear only works in range of rated output power and voltage problemfree (< 60 V DC).
  - Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection.
  - In case of overheating ( $T_c$  max. + approx.  $10^\circ$ ) the output current of the control gear will be reduced to 30%. After the temperature will drop below the critical temperature value, the output current rises again to the previously set value.
- No load operation: The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

### Mandatory regulations

- DIN VDE 0100
- EN 60598-1


### Mechanical mounting

- Mounting position: Built-in: Any position inside a luminaire is allowed  
Independent application: Drivers are allowed to use for independent applications with separate cord grip.
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices.  
Independent LED drivers do not need to be integrated into a casing.  
Installation in outdoor luminaires: degree of protection for luminaire with water protection rate  $\geq 4$  (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing.  
LED drivers should be mounted with the greatest possible clearance to heat sources.  
During operation, the temperature measure at the driver's  $t_c$  point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

### Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of  
built-in: 0,5-1,5mm<sup>2</sup> PVC cable  
independent: 0,75-1,5mm<sup>2</sup> PVC cable
- Stripped length: 7–8 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference).  
Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.  
Max. secondary side lead length: 2 m

- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.
- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.
- Parallel wiring: Parallel connection of LED loads is not allowed.
- Wiring diagram:

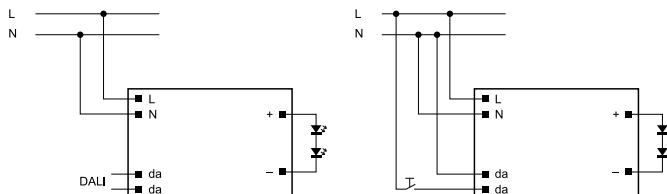

Note: Max. quantity of drivers at one push button: 30

### Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs  
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction  
The release reaction of the automatic conductor cut-outs comply with VDE 0641 part 11 for B characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers  
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m $\Omega$  (approx. 20 m [2.5 mm<sup>2</sup>] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
Automatic cut-out type		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
ECXd 700.679	<b>187444</b>	55	72	88	55	72	88
ECXd 1050.680	<b>187445</b>	37	48	59	37	48	59

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.